

SERVICE BULLETIN



M-1229

August 08, 2008

REVISED BATTERY TERMINAL SCREW AND TORQUE

Purpose

The purpose of this bulletin is to inform the dealers that Harley-Davidson Motor Company has made a change to the battery terminal screw used on all AGM batteries. The captive star washer has been replaced with a flat washer thereby changing the final torque of the fastener.

NOTE

- The new battery flange screw is part number 4312C and replaces part number 4312B.

- When using the battery terminal screw with the new flat washer, tighten fasteners to 60-70 in-lbs (6.8-7.9 Nm).

Required Dealer Action

Notify service personnel of service bulletin and follow the revised torque specifications.

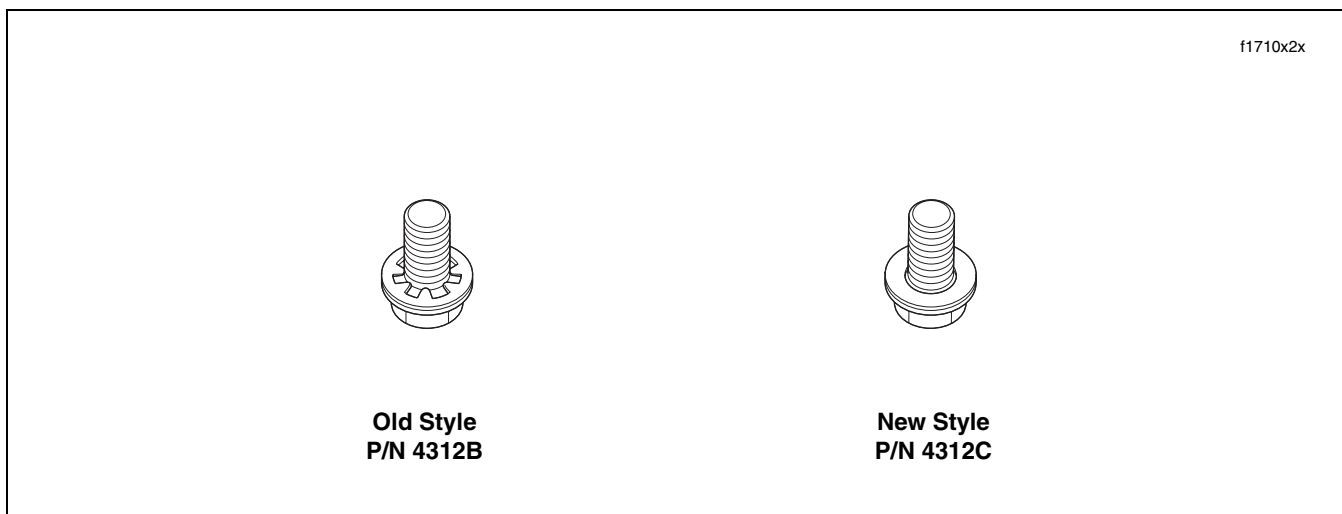


Figure 1. Battery Flange Screw

IMPORTANT NOTE

In the interest of preserving customer safety and satisfaction, always check for outstanding recalls whenever any motorcycle is brought into your dealership for either maintenance or service.

ROUTING	SERVICE MANAGER	SALES MANAGER	PARTS MANAGER	LEAD TECHNICIAN	TECHNICIAN NO.1	TECHNICIAN NO. 2	TECHNICIAN NO. 3	TECHNICIAN NO. 4	RETURN THIS TO
INITIAL HERE									

©2008 HARLEY-DAVIDSON MOTOR COMPANY