AN HARLEY-DAVIDSON

SERVICE BULLETIN

M-830A (Replaces M-830)

June 30, 1981

COLOR-CODED CAM GEAR SELECTION

NOTE

Part number changes have been made in the 1000cc Color-Coded Cam Gear Tables. The parts lists are different than the ones used in Service Bulletin M-830.

Cam gears for 1000/1200/1340cc models are supplied through Parts and Accessories in matched sets to provide the proper gear lash (tooth clearance) for quiet operation.

Cam gears are matched and color coded according to the diameter size as measured with special gauge pins.

See Figure 1. The gear diameter is measured with a micrometer over .105 in. diameter gauge pins on opposite sides of the gear. The pins are of the proper size to fit between the contacting surfaces of the gear teeth. Gear diameter should be measured in at least two places 90° apart. The required gauge pin set is available from Kent-Moore under Part No. HD-95632-79.

NOTE

Original gears may be different sizes (different color codes), to produce a properly matched set in any one engine. Parts order matched gear sets are of one color.

The accompanying tables list the part numbers of parts order matched gear sets and individual gears, the identifying color paint spot for each size gear and the upper and lower size limits.

Although all meshing gears in the same engine as produced in the factory are matched for proper fit, instances may occur where gears become worn after a period of service and excessive gear lash (tooth clearance) produces a rattling noise particularly noticeable at the gear case cover at low engine rpm.

In such cases, a larger gear size can be selected to reduce the tooth clearance between the mating gears for quieter operation.

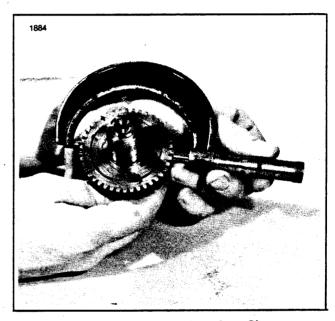


Figure 1. Measuring Cam Gear Size

1000cc Models

See Figure 2. In 1000cc engines which have four matched cam gears, increase the size of gears 1 and 3 (rear exhaust and front intake) by one color code and run engine to check for noise.

A size increase of gears 1 and 3 may be necessary, but no more than two size increases should be made before also increasing the size of gear 5. However, if a gear whine or howl is produced by a size increase, it indicates that there is not enough tooth clearance and the size of the affected gears must be reduced.

ROUTING:	SALES MANAGER	PARTS MANAGER	CHIEF MECHANIC	MECHANIC NO. 1	MECHANIC NO. 2	MECHANIC NO. 3	MECHANIC 'NO. 4	RETURN THIS TO:
INITIAL					ĺ			
HERE								

An alternative method of gear selection requires removal of the valve push rods, tappet blocks and spark plugs. Check for gear tooth tightness by moving gear back and forth with a screwdriver and noting the resistance to movement. Do this for several positions (rotate flywheels). On the average, there should be a slight drag. The gear should not be too tight at any one spot — this would indicate that the gear is out of round.

- 1. Measure gear size (diameter) over .105 in. dia. pins, Part No. HD-95632-79 using a micrometer caliper.
- 2. Select gear size to obtain proper tooth clearance for quietest operation. Gear rattle indicates fit is too loose (size is too small). Gear whine or howl indicates fit is too tight (size is too large).
- 3. As a procedure guide, increase or decrease size of gears 1 and 3 up to 2 color codes, then increase or decrease size of gear 5 corresponding amounts if necessary.

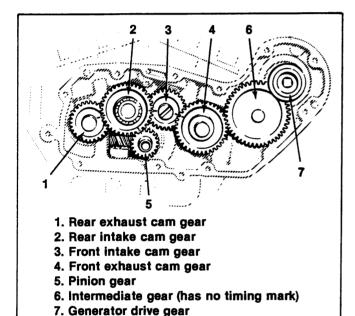


Figure 2. Cam Gear Fitting Procedure — 1000cc Models

1200/1340cc Models

See Figure 3. The same process is used to reduce gear noise in 1200 and 1340cc engines. Increase the size of

the cam gear and pinion gear progressively by one color code to reduce gear rattle and decrease the gear size progressively to reduce whine.

NOTE

It is possible that a mild gear "whine" may be present to some extent in a new engine and may not disappear during break-in. A mild whine is acceptable, but if excessive the gear train can be "fine-tuned" by using smaller size gears as described before.

- Measure gear size (diameter) over .105 in. dia. pins, Part No. HD-95632-79 using a micrometer caliper.
- Select gear size to obtain proper tooth clearance for quietest operation. Gear rattle indicates fit is too loose (size is too small). Gear whine or howl indicates fit is too tight (size is too large).
- Increase or decrease size of gears 1 and 2 one color code at a time to reduce noise.

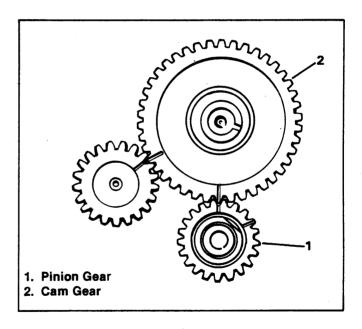


Figure 3. Cam Gear Fitting Procedure — 1200/1340cc Models

Color-Coded Cam Gears — 1000cc

Part No. &	Gear #1	Part No.	Gear #3
Color	Rear	Color	Front
Code	Exhaust	Code	Intake
Brown	1.8893	Brown	1.8893
25650-80	1.8903	25640-80	1.8903
Blue	1.8903	Blue	1.8903
25651-80	1.8913	25641-80	1.8913
Red	1.8913	Red	1.8913
25652-80	1.8923	25642-80	1.8923
White	1.8923	White	1.8923
25653-80	1.8933	25643-80	1.8933
Green	1.8933	Green	1.8933
25654-80	1.8943	25644-80	1.8943
Yellow	1.8943	Yellow	1.8943
25655-80	1.8953	25645-80	1.8953
Black	1.8953	Black	1.8953
25656-80	1.8963	25646-80	1.8963

1	t No. &	Gear #5
1	olor ode	Pinion
	Jue	FIIIIOII
1	own	1.2681
2405	55-74	1.2671
В	ue	1.2671
2405	56-74	1.2661
R	ed	1.2661
2405	57-74	1.2651
WI	nite	1.2651
2405	58-74	1.2641
Gr	een	1.2641
2405	59-74	1.2631
Yel	low	1.2631
2406	60-74	1.2621
Bla	ack	1.2621
2406	31-74	1.2611

1980 & Later

1977 & Later

GEAR NO.	1	2	2	3	4	4	5	6
Year	1959- 1979	1971	- 1979	1959- 1979	1971	-1979	1954- 1976	1957- 1979
Part No.	25504-59	25485-71		25501-59	25503-71		24011-37	25776-57
Color Code	Rear Exhaust	Rear Intake Inner	Rear Intake Outer	Front Intake	Front Exhaust Inner	Front Exhaust Outer	Pinion	ldler
Brown	1.8893	1.8953	2.3902	1.8893	1.8953	2.3902	1.2681	3.0223
	1.8903	1.8943	2.3912	1.8903	1.8943	2.3912	1.2671	3.0213
Blue	1.8903	1.8943	2.3912	1.8903	1.8943	2.3912	1.2671	3.0213
	1.8913	1.8933	2.3922	1.8913	1.8933	2.3922	1.2661	3.0203
Red	1.8913	1.8933	2.3922	1.8913	1.8933	2.3922	1.2661	3.0203
	1.8923	1.8923	2.3932	1.8923	1.8923	2.3932	1.2651	3.0193
White	1.8923	1.8923	2.3932	1.8923	1.8923	2.8932	1.2651	3.0193
	1.8933	1.8913	2.3942	1.8933	1.8913	2.3942	1.2641	3.0183
Green	1.8933	1.8913	2.3942	1.8933	1.8913	2.3942	1.2641	3.0183
	1.8943	1.8903	2.3952	1.8943	1.8903	2.3952	1.2631	3.0173
Yellow	1.8943	1.8903	2.3952	1.8943	1.8903	2.3952	1.2631	3.0173
	1.8953	1.8893	2.3962	1.8953	1.8893	2.3962	1.2621	3.0163
Black	1.8953	1.8893	2.3962	1.8953	1.8893	2.3962	1.2621	3.0163
	1.8963	1.8883	2.3972	1.8963	1.8883	2.3972	1.2611	3.0153

1979 & Earlier

COLOR CODE	1 PINIC	ON GEAR	2 CAM GEAR			
L	ATE 1977 & LATER 1200/	1340cc MODELS (MATCHE	D SET PART NO. 2458	2-77)		
	Part No.	Size (in.)	Part No.	Size (in.)		
Orange	24040-78	1.4756/1.4751	25527-81	2.7324/2.7334		
White	24041-78	1.4751/1.4745	25528-81	2.7334/2.7344		
Yellow	24042-78	1.4745/1.4737	255 29- 81	2.7344/2.7354		
Red	24043-78	1.4737/1.4729	25530-81	2.7354/2.7364		
Blue	24044-78	1.4729/1.4721	25531-81	2.7364/2.7374		
Green	24045-78	1.4721/1.4715	25532-81	2.7374/2.7384		
Black	24046-78	1.4715/1.4710	25534-81	2.7384/2.7394		
	1954	TO EARLY 1977 1200 MOL	DELS			
			25523-56			
	Part No. 240)10-54/size (in.)	Part No.'s 244	23-70 Size (in.)		
Orange	1.449	1.449 /1.4485		2.7665/2.7670		
Black	1.448	1.4485/1.4480		2.7670/2.7675		
Red	1.448	0/1.4475	2.7675/2.7680			
Blue	1.447	5/1.4470	2.7680/2.7685			
Green	1.447	0/1.4465	2.7685/2.7690			
White	1.4465/1.4460		2,7690/2.7695			
Brown	1.4460/1.4455		2,7695/2.7700			
Yellow	1.445	1.4455/1.4450		2.7700/2.7705		
Yellow & Red	1.445	1.4450/1.4445		2.7705/2.7710		
Brown & Red	1.4445/1.4440		2.7710/2.7715			

Color-Coded Cam Gears — 1200/1340cc