

# SERVICE BULLETIN



M-958

December 12, 1987

## TUBELESS TIRE VALVE STEM - 9-SPOKE WHEELS

This Service Bulletin concerns replacement valve stems for 9-spoke cast wheels.

See Figure 1. When replacing valve stems on any vehicle with 9-spoke cast wheels, including those installed as part of the 062 recall program, the bolt-in style valve stem must be used.

### WARNING

**Use of the rubber automotive style valve stem in 9-spoke cast wheels could cause air loss and adversely affect handling.**

### NOTE

*1987 and later FLT Model motorcycles continue to use the automotive style valve stem for front and rear applications except for wire spoke wheels.*

Refer to **TIRES** Section in the appropriate Service Manual for replacement procedures.

### NOTE

*FXR/XLH Models front and rear tire rims use different size valves.*

### Part Numbers:

#### FXR/XLH Models

Front rim (9-spoke)	43150-83
Rear rim (9-spoke)	43157-83A
Rear rim (Disc)	43157-83A

#### FLT Models

Both	40999-87
------	----------

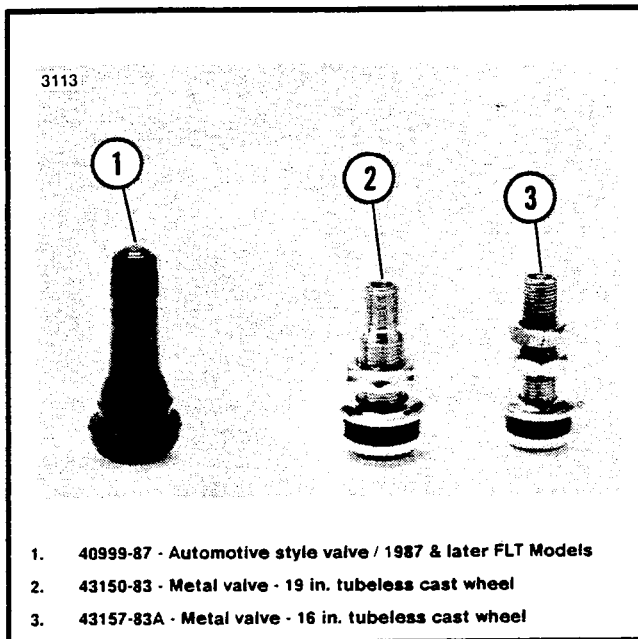


Figure 1. Tubeless Tire Valve Stem

ROUTING:	SERVICE MANAGER	SALES MANAGER	PARTS MANAGER	LEAD TECHNICIAN	TECHNICIAN NO. 1	TECHNICIAN NO. 2	TECHNICIAN NO. 3	TECHNICIAN NO. 4	RETURN THIS TO:
INITIAL HERE									