



INSTRUCTIONS

-J00086

REV. 4-1-93

Kit Numbers 38619-86TA and 38621-86TA

CLUTCH CABLE ASSEMBLY

General

Kit 38619-86TA is designed for installation on 1986 and later XLH model vehicles with low handlebars. Kit 38621-86TA is designed for use on 1986 and later XLH model vehicles with buckhorn handlebars. Each kit contains:

QTY	DESCRIPTION	PART NUMBER
1	Washer, copper	Not sold separately
1	Cable, clutch	Not sold separately
1	Pin, cable pivot	Not sold separately

Installation

See applicable XL Service Manual for detailed disassembly procedures.

1. Remove clutch handlever from handlever bracket at pivot pin. Remove original clutch cable from handlever and clutch. Retain anchor pin bushings.
2. Remove original clutch cable from primary cover.
3. See Figure 1. Install lever end of new clutch cable. Position cable eyelet in clutch lever slot. Retain with new cable pivot pin through original bushings.

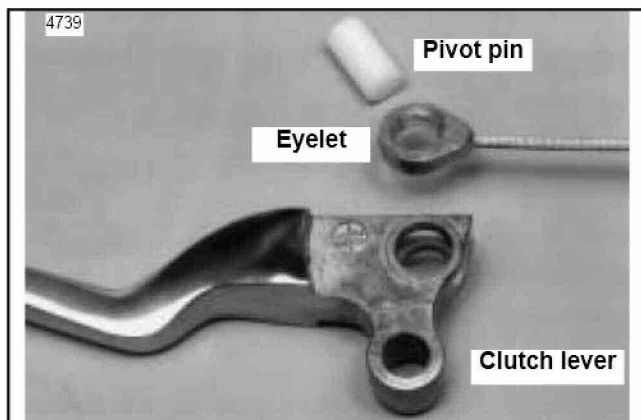


Figure 1. Cable Installation

4. Secure clutch lever in lever bracket with lever pivot pin and retaining ring.
5. Install clutch end of new cable to primary cover with copper washer according to Service Manual instructions.
6. Adjust clutch cable according to Service Manual instructions.



INSTRUCTIONS

-J00086

REV. 4-1-93

Kit Numbers 38619-86TA and 38621-86TA

CLUTCH CABLE ASSEMBLY

General

Kit 38619-86TA is designed for installation on 1986 and later XLH model vehicles with low handlebars. Kit 38621-86TA is designed for use on 1986 and later XLH model vehicles with buckhorn handlebars. Each kit contains:

QTY	DESCRIPTION	PART NUMBER
1	Washer, copper	Not sold separately
1	Cable, clutch	Not sold separately
1	Pin, cable pivot	Not sold separately

Installation

See applicable XL Service Manual for detailed disassembly procedures.

1. Remove clutch handlever from handlever bracket at pivot pin. Remove original clutch cable from handlever and clutch. Retain anchor pin bushings.
2. Remove original clutch cable from primary cover.
3. See Figure 1. Install lever end of new clutch cable. Position cable eyelet in clutch lever slot. Retain with new cable pivot pin through original bushings.

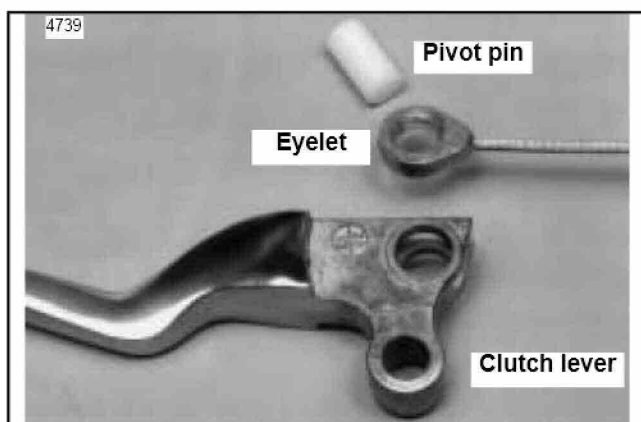


Figure 1. Cable Installation

4. Secure clutch lever in lever bracket with lever pivot pin and retaining ring.
5. Install clutch end of new cable to primary cover with copper washer according to Service Manual instructions.
6. Adjust clutch cable according to Service Manual instructions.