



INSTRUCTIONS

-J00215

REV. 7-1-95

Kit Number 52150-96

GRAB STRAP KIT

General

This kit is designed for installation on all 1983 and later XL model vehicles.

This kit contains the following components:

QTY	DESCRIPTION	Part No.
1	Screw, Torx, 1/4-20 x 3/4 in. (use on 1996 and later only)	941
1	Screw, hex head, 1/4-28 x 5/8 in. (use on 1983 -1995 only)	3765
1	Washer, flat, 1/4 in. ID x 1 in. OD	6036
1	Washer, external tooth	7230
1	Grab strap (use on 1983 and later only)	

NOTE

The only Service Parts for this kit have part numbers listed above.

CAUTION

While performing the following installation procedures, be careful not to scratch fender or other painted parts with metal bracket tabs on bottom of seat.

Installation

NOTE

This grab strap is attached to the solo seat mounting hole on top of rear fender.

1. Remove screws, washers and nuts securing passenger grab strap (if vehicle is so equipped) and discard all components.
2. See Figure 1. Remove and save screw, and plastic washer securing seat to fender. Remove seat.

CAUTION

Make certain you select the correct screw (from kit) in step 3. Attempting to install a coarse threaded screw in a fine threaded hole, or vice versa, will damage threads in weld nut in fender and on screw.

3. Select screw to secure grab strap to fender as follows:

On 1995 and earlier models use: Screw, hex head, 1/4-28 x 5/8 in.

On 1996 and later models use: Screw, Torx, 1/4-20 x 3/4 in. and external tooth washer

4. See Figure 1. Locate grab strap, screw (selected above) and flat washer from kit. Insert screw through washer. See Figure 2. Insert screw with washer through appropriate holes in grab strap.
5. See Figure 1. Insert screw into hole in fender and torque to 3 - 5 ft-lbs.
6. See Figure 1. Slip rear section of seat through grab strap. Bring seat forward and engage clip on bottom front of seat into seat bracket on frame. Secure seat to fender using original screw and plastic washer removed in Step 2. (Install washer between seat bracket and fender.) Tighten screw securely.

WARNING

After installing seat, pull upward on front of seat to be sure it is locked in position. If seat is loose, it could shift position during vehicle operation and startle the rider, causing loss of control and personal injury.

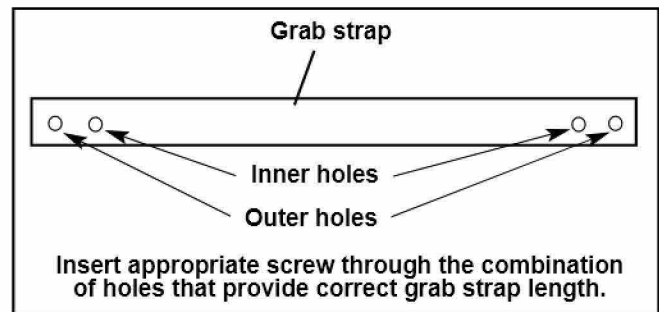


Figure 2. Grab Strap Holes

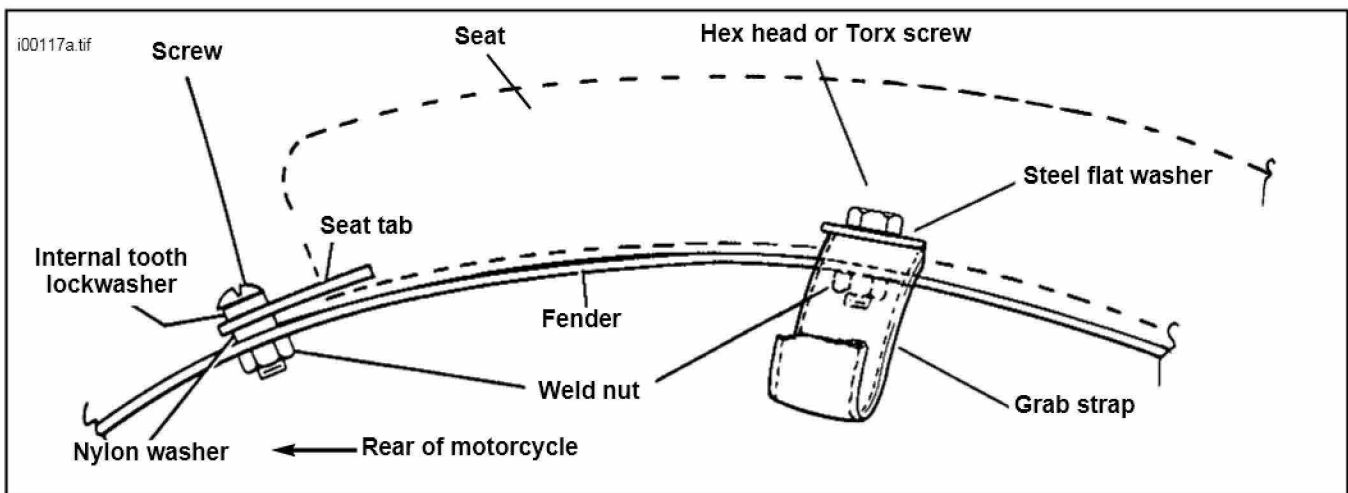


Figure 1. Hardware, Seat Bracket and Grab Strap Assembly