



INSTRUCTIONS

-J00243

REV. 11-1-95

Kit Number 52806-94A

SISSY BAR SIDE PLATE KIT

General

This kit is designed for installation on all 1994 and Later XL model vehicles.

Kit contents:

QTY	DESCRIPTION
1	Sideplate, right
1	Sideplate, left
2	Reflectors
4	Screws, hex socket button head (chrome)

Installation



When removing rear fender reflectors, be careful not to damage fender paint.

1. Carefully remove reflector and any remaining adhesive from side of rear fender.

2. See Figure 1. Remove two hex socket button head screws (3) and locknuts that attach fender support to fender. Discard button head screws (3) and retain locknuts for reinstallation.

NOTE

When installing new hex socket button head screws, make sure the steel T-spacers are still in the fender isolators before tightening the assembly.

3. Position side plate (1) on fender support as indicated. Attach side plate (1) to fender support using two hex socket button head screws (3) from kit and original locknuts. Tighten button head screws to 8-13 ft-lbs.
4. Obtain reflector (2) from kit. Peel off protective strip backing and firmly press reflector (2) to side plate (1), centering reflector horizontally and vertically.
5. Repeat steps 1 through 4 on opposite side of fender.

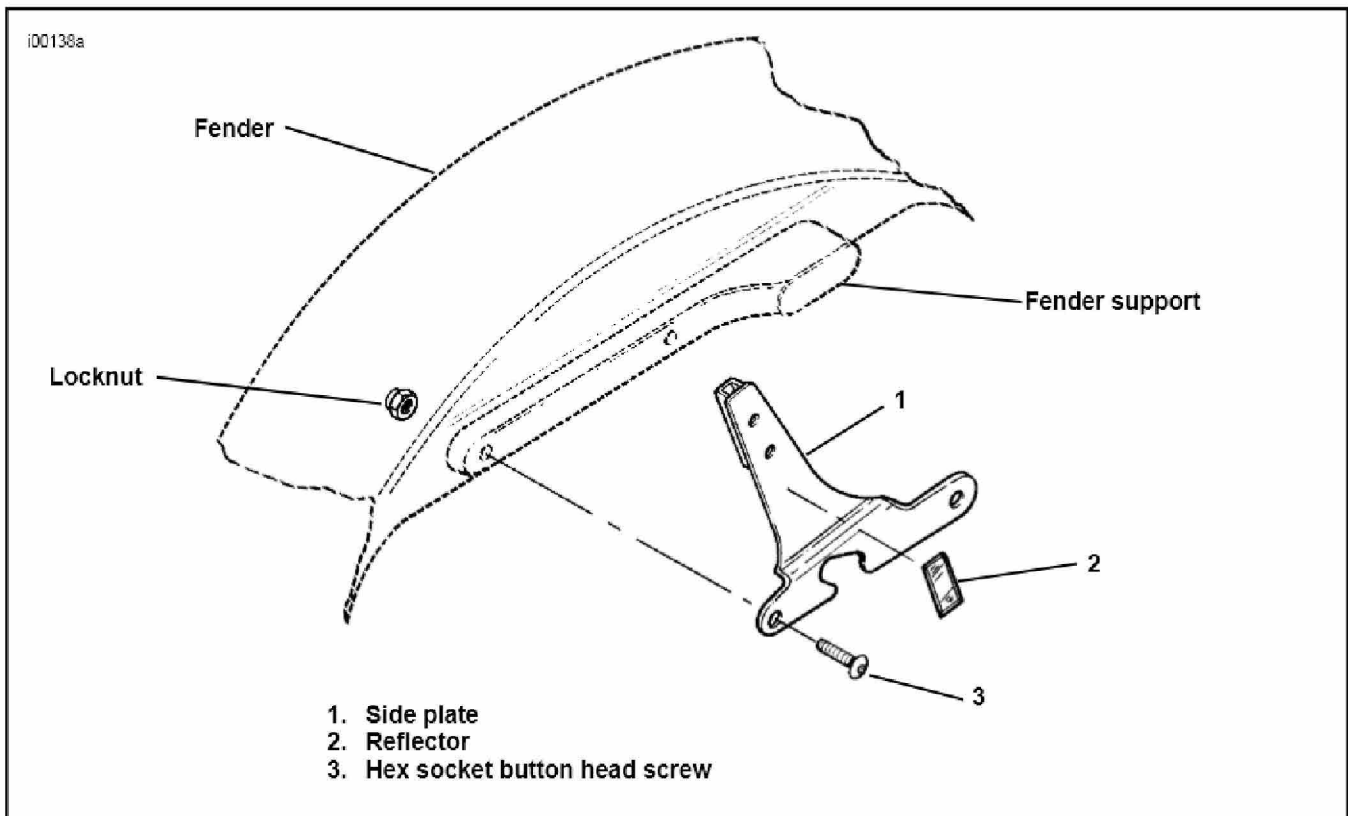


Figure 1. Side Plate and Hardware Installation