



# INSTRUCTIONS

-J00421

REV. 07-08-03

Kit Numbers 67799-95T, 67913-95T, 67914-95T, and 68097-96

## “SPORT” TURN SIGNAL VISOR KIT

### General

These kits fit 1986-2001 XL, FXR (except FXRT), Softails (except FXSTD, FLSTC, FLSTN rear), and 1991-2001 Dyna models (except 2001 FXDX, FXDXT).

#### Kit Descriptions:

- Part No. 67799-95T - Plain visor with no logo
- Part No. 67913-95T - Gold logo on visor
- Part No. 67914-95T - Chrome logo on visor
- Part No. 68097-96 - Fatboy logo on visor

#### Kit Contents:

QTY	DESCRIPTION
2	Turn signal visors
2	Gaskets

*NOTE*  
There are no individually sold Service Parts for these kits.

### Installation

- Place the visor onto the turn signal and position it so the visor is at the top of the turn signal. Mark or note where the center of the visor is located on the turn signal housing.
- Measure the length of the gasket and place a mark at its midpoint.
- See Figure 1. Remove paper backing from gasket. Position “cut-out” edge on gasket toward front of turn signal and align center mark on gasket with visor center established in step 1.

*NOTE*  
The gasket must be located on the circumference of the signal lens as specified in step 3 to insure that the gasket gap and gap in the clamp ring coincide.

- Press gasket firmly in place and allow gasket adhesive to cure for 48 hours.

### CAUTION

Do not overtighten screw in step 5. Over tightening could damage turn signal lens.

- See Figure 2. Slip visor over gasket and tighten screw gently until visor is secured in position.
- Repeat steps 1 through 5 for other turn signal.


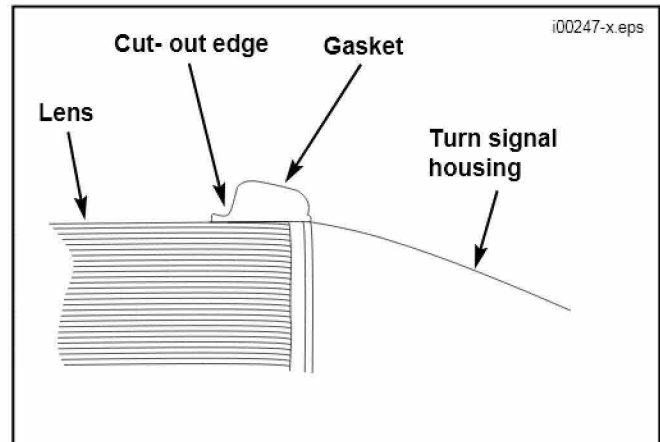


Figure 1. Gasket Location

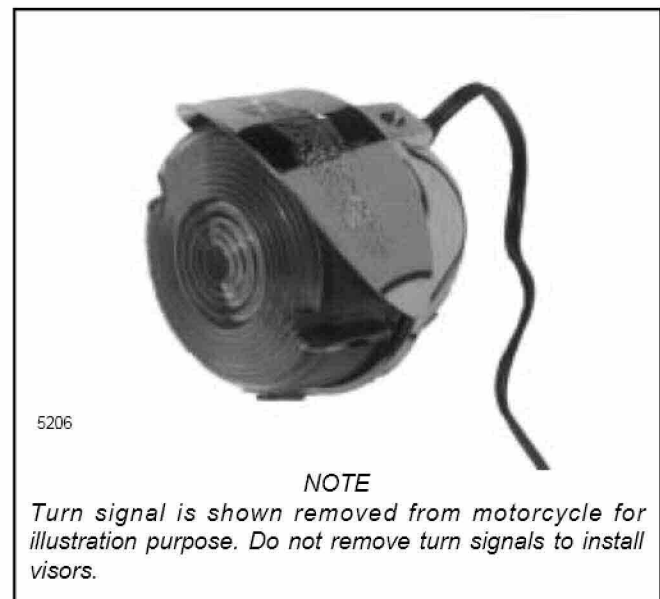

*NOTE*  
Turn signal is shown removed from motorcycle for illustration purpose. Do not remove turn signals to install visors.

Figure 2. Visor Mounted