



# INSTRUCTIONS

-J01000

2005-10-03

## FRONT FENDER

### GENERAL

#### Kit Number

59495-97 (cafe style) and 59496-97 (sport style)

#### Models

These kits fit 1988 and later XL, 1991-2005 FXD, and FXR models.

#### Kit Contents

See Figure 2 and Table 1.

### INSTALLATION

#### NOTE

Use care when removing and installing fenders to prevent scratching the fender paint.

1. Remove original equipment fender mounting screws and nuts from fender.
2. Remove original equipment fender, being careful not to scratch the fender paint.

#### NOTE

The brackets should fit snug against the inside of fender with mounting holes in bracket and fender aligned with each other, and the bracket seated in groove made by the inside fender tab.

If the brackets are turned so that they are not flush with the contour of the fender, they may pop out of the inside fender groove and damage the tire, resulting in personal injury.

3. See Figure 1 and Figure 2. Place fender brackets (1) from kit on inside of fender.

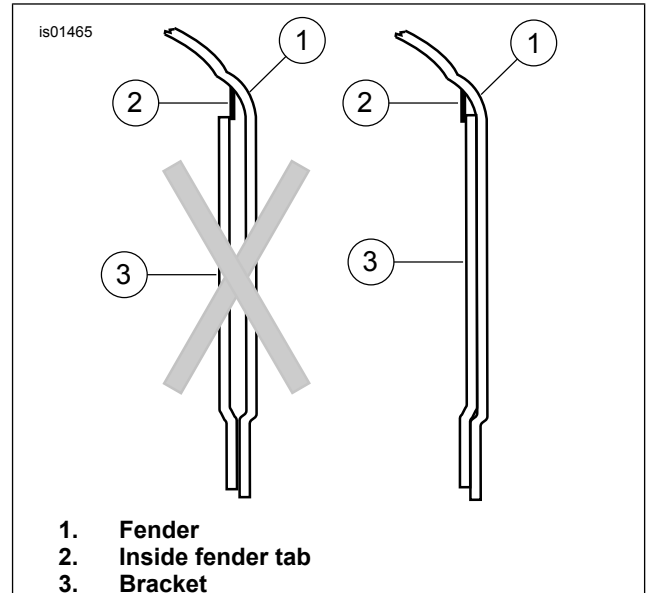


Figure 1. Position Inside Fender Brackets

4. See Figure 2. Position new fender (2) between forks and align fender mounting holes, being careful not to scratch the fender paint.
5. Install two screws (3) and locknuts (4) in fender. Tighten locknuts to 10-14 ft-lbs (14-19 Nm).

### SERVICE PARTS

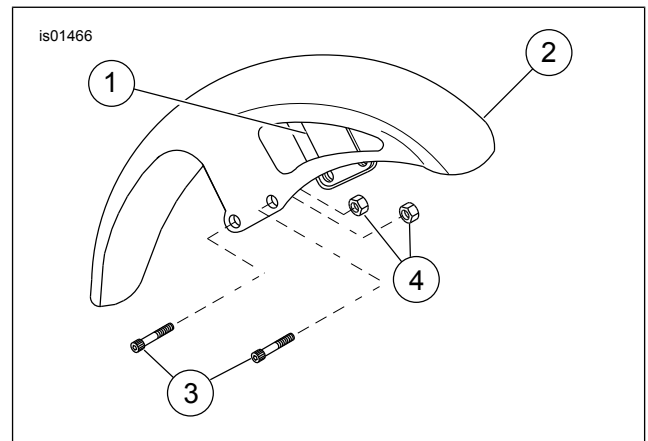


Figure 2. Service Parts: Front Fender

Table 1. Service Parts: Front Fender

Description (Quantity)	Part Number
Fender bracket (2)	Not Sold Separately
Fender	Not Sold Separately
Socket head capscrew (4)	4816A
Locknut (4)	7531

-J01000

Many Harley-Davidson® Parts & Accessories are made of plastics and metals which can be recycled. Please dispose of materials responsibly.

1 / 1