



INSTRUCTIONS

-J01204

REV. 2-13-98

Kit Numbers 61929-98 and 61930-98

SPORTSTER TANK BRA

General

These kits fit the following Sportster fuel tanks listed below:

- 61929-98 All 3.3 gallon XL fuel tanks
- 61930-98 All 2.25 gallon XL fuel tanks

Installation


⚠ CAUTION

To avoid scratching the fuel tank finish, first wash and wax tank. Before placing bra on tank, check to make sure that the bra liner is free from any foreign objects that may scratch the tank surface.

1. See illustration. Place elastic strap over front edge of fuel tank against frame tube. Pull bra to the rear of tank and fit bra snugly around end of tank.
2. Arrange elastic strap under fuel tank and smooth out any wrinkles in bra.

NOTE

If bra becomes soaked, it should be removed and allowed to air dry.

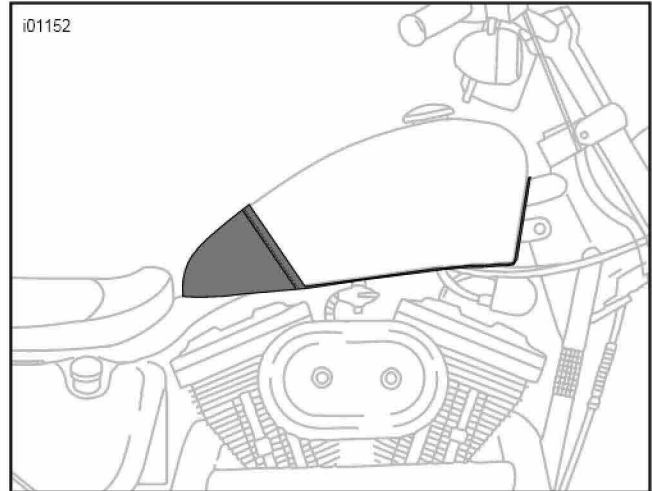

Installing Tank Bra



INSTRUCTIONS

-J01204

REV. 2-13-98

Kit Numbers 61929-98 and 61930-98

SPORTSTER TANK BRA

General

These kits fit the following Sportster fuel tanks listed below:

- 61929-98 All 3.3 gallon XL fuel tanks
- 61930-98 All 2.25 gallon XL fuel tanks

Installation


⚠ CAUTION

To avoid scratching the fuel tank finish, first wash and wax tank. Before placing bra on tank, check to make sure that the bra liner is free from any foreign objects that may scratch the tank surface.

1. See illustration. Place elastic strap over front edge of fuel tank against frame tube. Pull bra to the rear of tank and fit bra snugly around end of tank.
2. Arrange elastic strap under fuel tank and smooth out any wrinkles in bra.

NOTE

If bra becomes soaked, it should be removed and allowed to air dry.

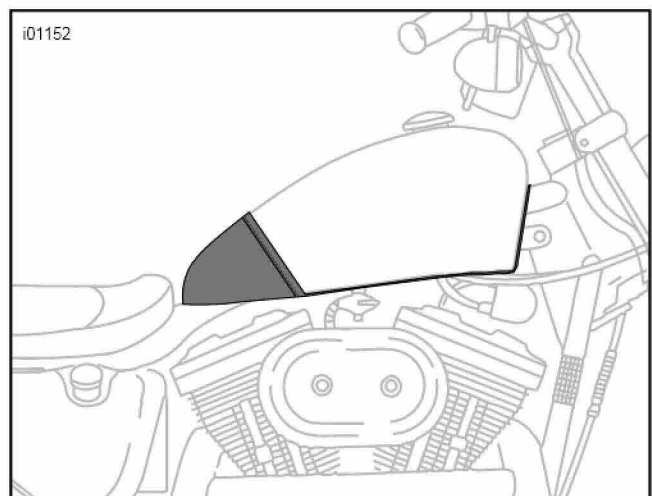

Installing Tank Bra