2006-11-21

SIX SPOKE FRONT AND REAR FLOATING ROTOR KITS

GENERAL

-J03832

Kit Number

45118-06, 45047-06

Models

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

Additional Parts Required

Installation of rear disc kit Harley-Davidson Part Number 45047-06 on FXSTD 17-inch wheels require separate purchase of brake rotor hub plate Harley-davidson Part Number 43837-00.

WARNING

Rider and passenger safety depend upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333b)

NOTE

This instruction sheet references Service Manual information. A Service Manual for your model motorcycle is required for this installation and is available from a Harley-Davidson Dealer.

Kit Contents

See Figure 1 and Table 1.

INSTALLATION

See the appropriate CHASSIS section in the Service Manual for rotor removal, assembly, and disassembly procedures.

NOTE

The floating-disc screw holes are countersunk to accept the retaining-screw heads. Be sure to install the screws properly.

- Assemble the brake disc pads as described in the CHASSIS section of the Service Manual.
- See Figure 1. Install the new screws (1). Tighten rear disc screws to 30-45 ft-lbs (40.7-61.0 Nm) and front disc screws to 16-24 ft-lbs (21.6-32.5 Nm).

Avoid hard stops for 300 miles. Hard stops during the wear-in period will gall discs.

SERVICE PARTS

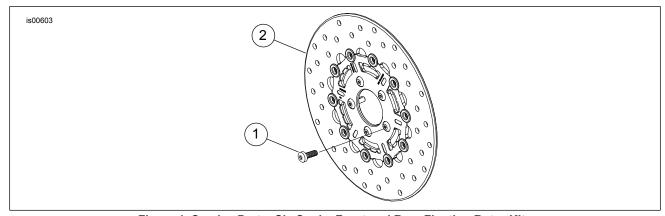


Figure 1. Service Parts: Six Spoke Front and Rear Floating Rotor Kits

Table 1. Service Parts: Six Spoke Front and Rear Floating Rotor Kits

Kit	Item	Description (Quantity)	Part Number
Kit 45118-06 and 45047-06	1	Screw, front disc (5)	3655A
		Screw, rear disc (5)	43567-92
	2	Brake disc, front and rear	Not Sold Separately