

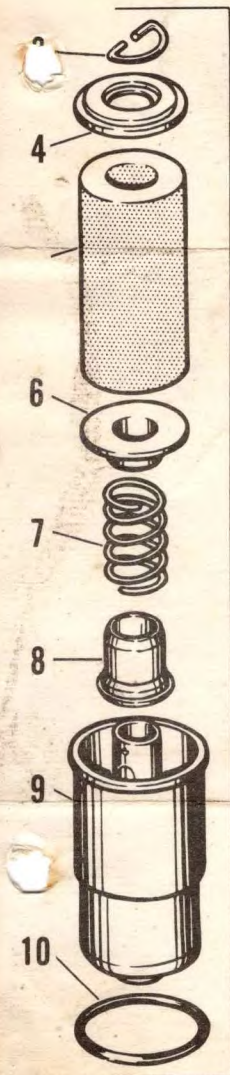
PART NUMBER

63839-53

Orig. 4-68

INSTRUCTIONS

AMF | HARLEY-DAVIDSON

GENUINE PARTS
AND ACCESSORIES**OIL FILTER ELEMENT KIT**

This filter element kit is a direct replacement on 1968 and later models. Kit includes cap seal washer (4) and cup seal (8) which should be replaced each time a new filter element is installed.

Remove drain plug and drain tank. To remove cap assembly (1) unscrew wing nut and turn cap counterclockwise. Lift cup assembly (2) from tank. Remove filter clip (3) seal (4) element (5) lower washer (6) and spring (7).

Using a wire hook, pull seal (8) from cup standpipe and discard.

Reinstall parts in reverse order as shown using new seal (8) filter (5) and seal washer (4). Be sure O-ring (10) is in place under cup lip when reinstalling cup in tank.

NOTE: This kit includes seal (8) which was not used on earlier than 1968 oil filters. This seal will not fit correctly in early oil filters unless late-type spring (7) Part No. 63831-67 and late-type washer (6) Part No. 63846-67 are also used.

- | | |
|--------------------|-----------------|
| 1. Cap Assembly | 6. Lower Washer |
| 2. Cup Assembly | 7. Cup Spring |
| 3. Filter Clip | 8. Cup Seal |
| 4. Cap Seal Washer | 9. Cup |
| 5. Filter Element | 10. O-ring |